

## SHAFT COLLARS ANODES

ZINC PART	SHAFT (INCHES)	O. D. (INCHES)	LENGTH (INCHES)	LBS
X-1	0.75	2.12	2.12	1.2
X-2	0.87	2.12	2.12	1.1
X-3	1	2.12	2.12	1.1
X-4	1.12	2.12	2.12	0.9
X-5	1.25	2.37	2.5	1.2
X-5A	1.25	2.62	2.5	1.7
X-6	1.37	2.5	2.5	1.5
X-7	1.5	2.5	2.5	1.4
X-8	1.75	3.25	2.87	2.5
X-8A	1.75	3.5	3.5	4.1
X-9	2	3.25	2.87	2.1
X-9A	2	3.5	3.5	3.5
X-10	2.25	4.25	3.75	6
X-10A	2.37	4.25	3.75	5.7




ZINC PART	SHAFT (INCHES)	O. D. (INCHES)	LENGTH (INCHES)	LBS
X-11	2.5	4.25	3.75	5.3
X-12	2.75	4.75	3.62	7.4
X-13	3	4.75	3.62	6
X-14	3.25	5.2	3.75	8.1
X-15	3.5	5.6	3.75	9.1
X-16	3.75	5.5	3.75	8.5
X-17	4	5.5	3.75	7.3
X-18	4.5	6.5	3.5	8.4
X-19	5	7	3.5	9.5

### METRIC

ZINC PART	SHAFT (MM)	O. D. (MM)	LENGTH (MM)	LBS
X-25	25 mm	2.12	2.12	1.1
X-30	30 mm	2.31	2.37	1.3
X-35	35 mm	2.62	2.5	1.5
X-40	40 mm	3.25	2.87	2.6
X-50	50 mm	3.25	2.87	2.1

## DONUT COLLARS ANODES

ZINC PART	SHAFT (INCHES)	O.D. (INCHES)	LENGTH (INCHES)	LBS
C-1	0.75	2.12	1	.7
C-2	0.87	2.12	1	.7
C-3	1	2.5	1.25	1.2
C-4	1.12	2.5	1.25	1.1
C-5	1.25	2.5	1.25	1
C-6	1.37	3	1.25	1.5
C-7	1.5	3	1.25	1.5
C-8	1.75	3.5	1.37	3.2
C-9	2	3.5	1.37	2.8
C-9A	2.25	3.5	1.37	2.4
C-12	2.5	5	1.5	5.3
C-12A	2.75	5	1.5	4.8
C-13	3	5	1.5	4.3
C-14	3.5	6.5	1.5	7.8
C-15	4	6.5	1.5	6.8

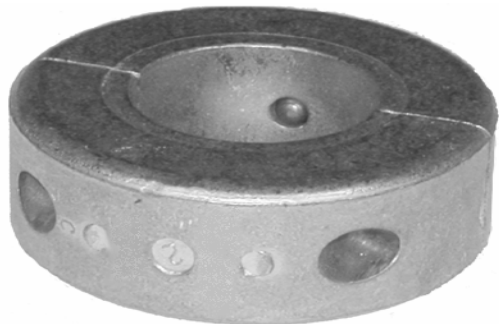

## RUDDER DISC ANODES

ZINC PART	DIA (INCHES)	THICK (INCHES)	LBS
R-1	1.87	0.25	0.2
R-2	2.75	0.5	0.9
R-3	3.75	0.5	1.6
R-4	5	0.62	3.2
R-5	5.12	0.87	4.8
R-7	6.5	0.87	9.1

### JEANNEAU

ZINC PART	DIA (MM)	THICK (MM)	LBS
J-75 mm	2.95	0.55	1.1
J-110 mm	4.33	0.65	2.4



RUDDER DISC

JEANNEAU